



Avenberg Kamado XL

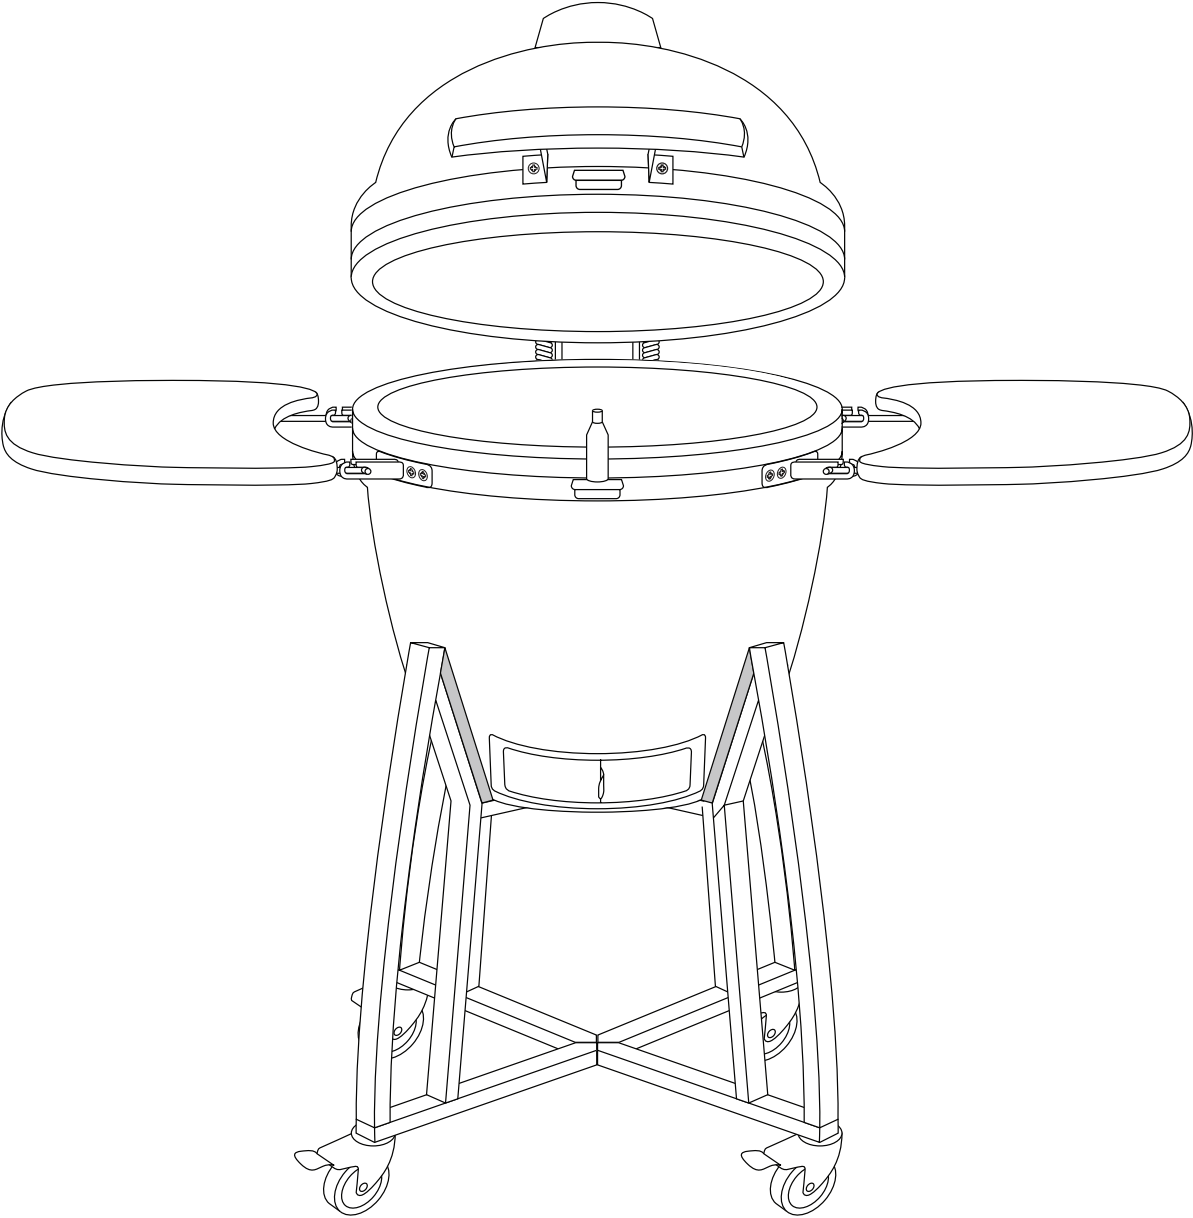


Parts list

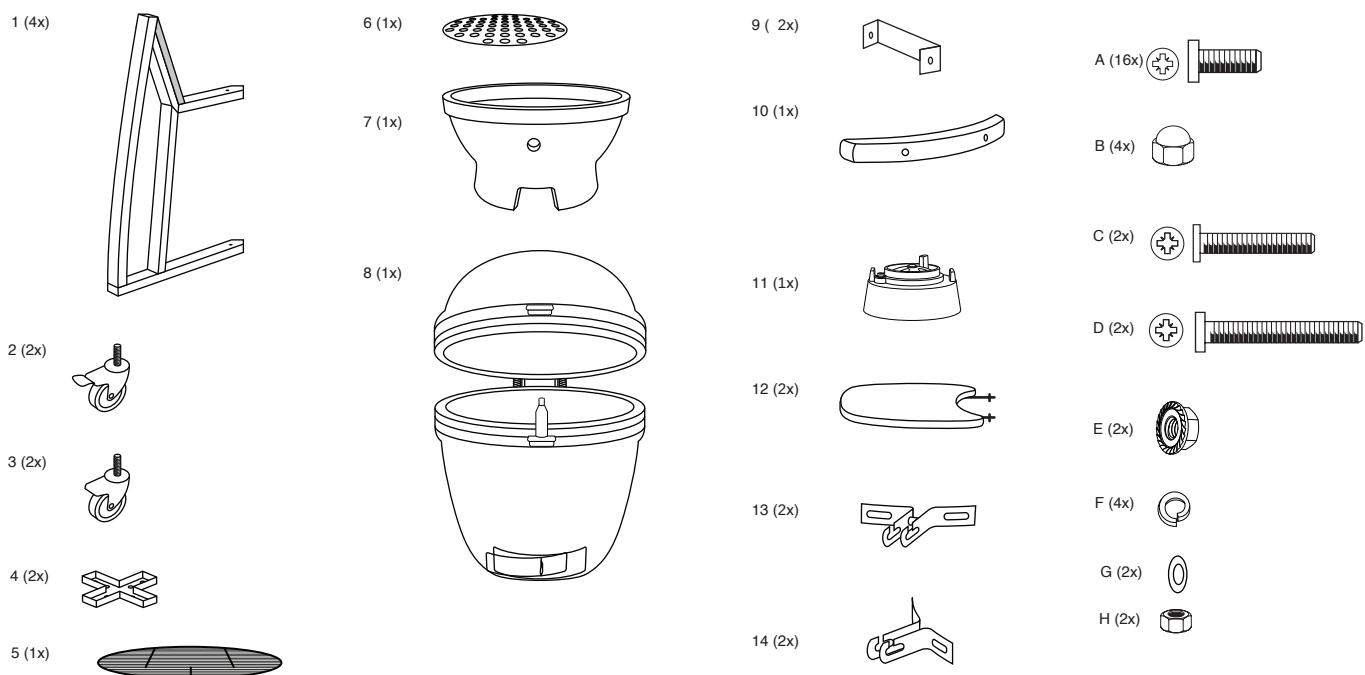


Assembly instructions

IMPORTANT - Remove any packaging before use, but retain the safety instructions and store them with this product. Ensure that the lid is closed prior to assembly.

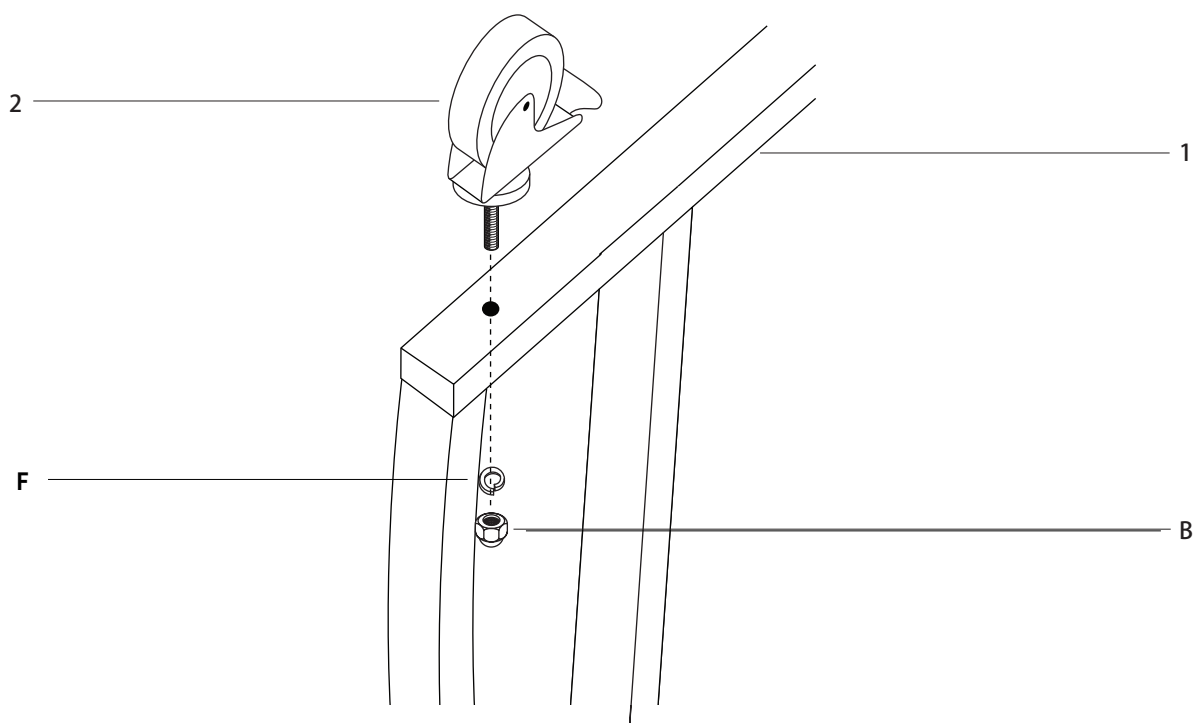


STEP 1 - Attach the four pre-threaded castor wheels (2 & 3) to each of the four brackets (1) by pushing them through the hole. Using an adjustable spanner secure each castor wheel with 1x nut (B).

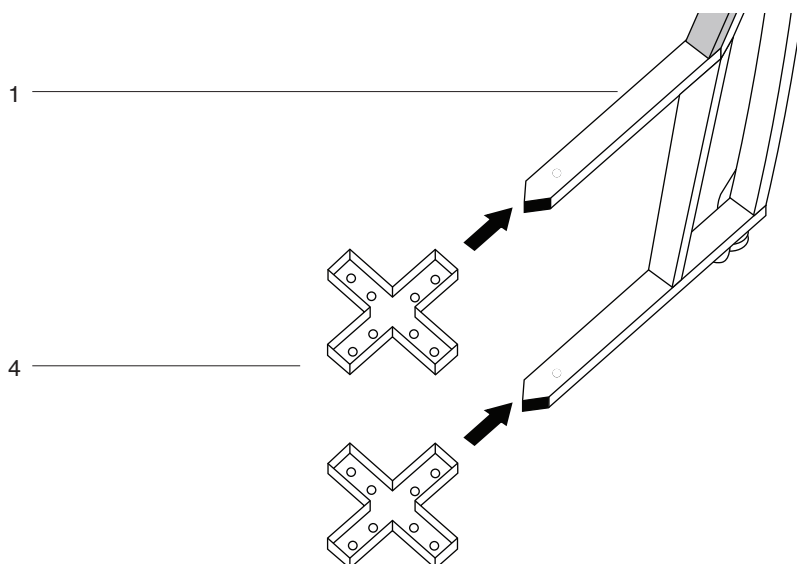

STEP 2 - To assemble the cart insert the two cross pieces (4) into one of the four brackets (1) from both the top and bottom.

STEP 3 - Continue to insert the cross pieces (4) into the other three brackets (1).

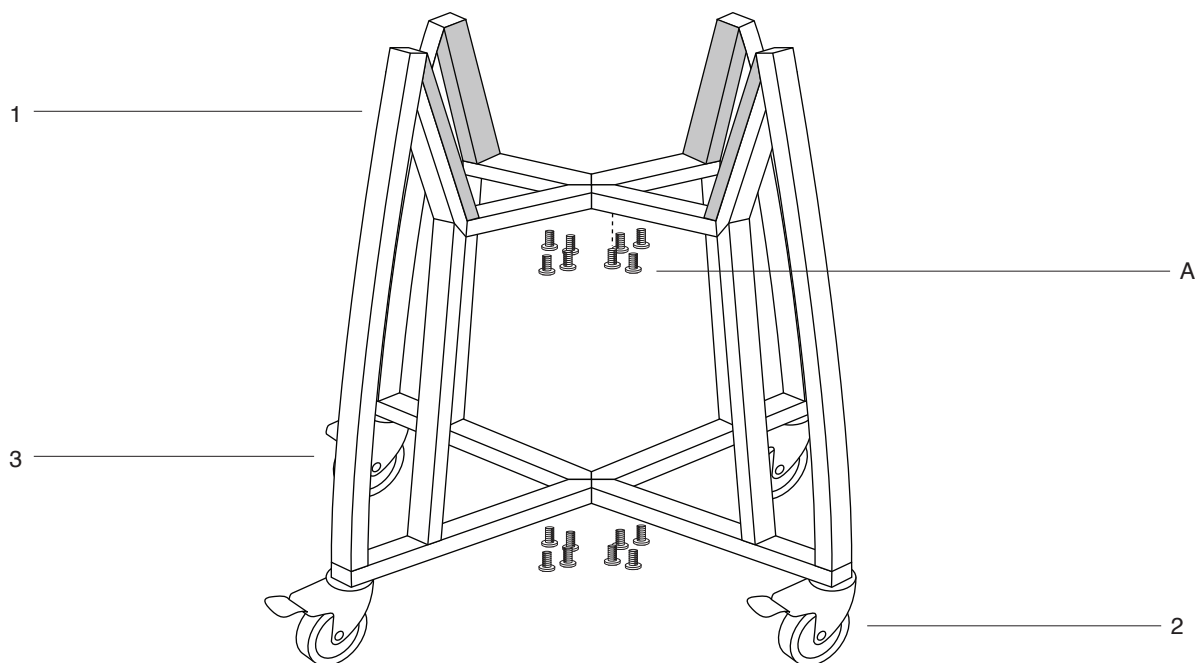


STEP 4 - Secure the brackets (1) to the cross pieces (4) by using the 16x screws (A). Make sure the cart is secure and all of the screws are tight before placing the Kamado Grill (9) into it.

STEP 5 - To place the Kamado Grill (9) on the cart first remove all of the items that are inside of the grill to make lifting easier.


STEP 6 - Use a minimum of two people when lifting the Kamado Grill onto the cart. Place one of your hands in the bottom vent of the Kamado and the other under the grill. Lifting by the hinge or the side tables could result in injury and damage to the product.

STEP 7 - Place the Kamado Grill on the cart with the bottom vent facing to the front of the cart allowing the vent to open and close without any interruption.

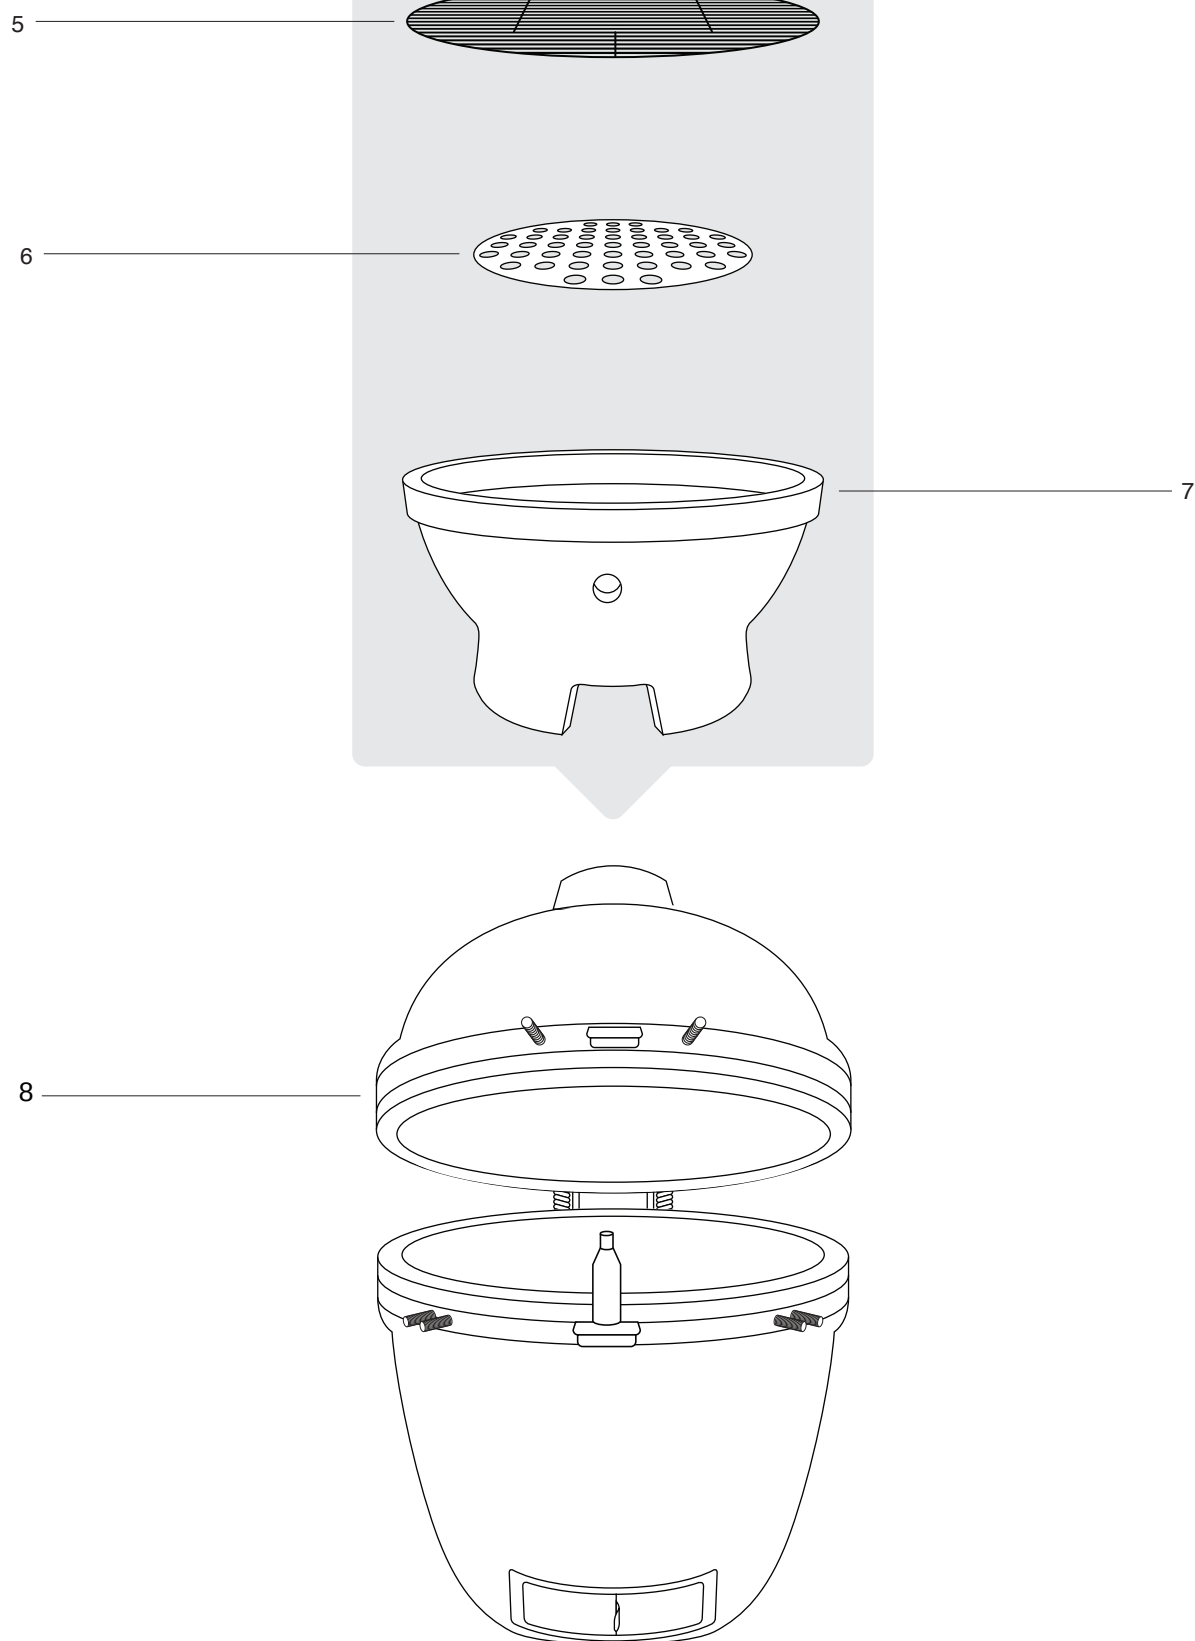


STEP 8 - When the grill is securely placed on the cart add the firebox (7), charcoal plate (6), and cooking grill (5) inside of the Kamado Grill as displayed in the assembly diagram.

STEP 9 - Press down on the castor levers (2) to lock the castor wheels to ensure the Kamado can not move when in use.

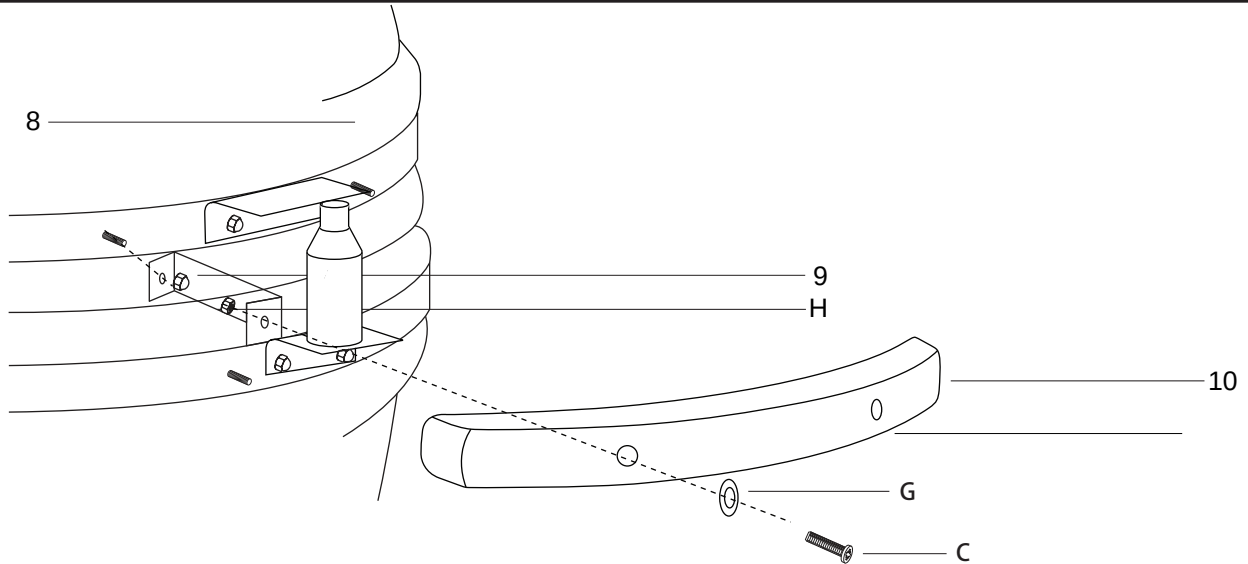


STEP 10 - To attach the handle (9) to the lid of the Kamado Grill (8) start by attaching 2x handle brackets (10) using the 2x pre-attached bolts and dome headed nuts. Attach the handle (10) to the brackets (9) using 2x bolts (C) and nuts (H).

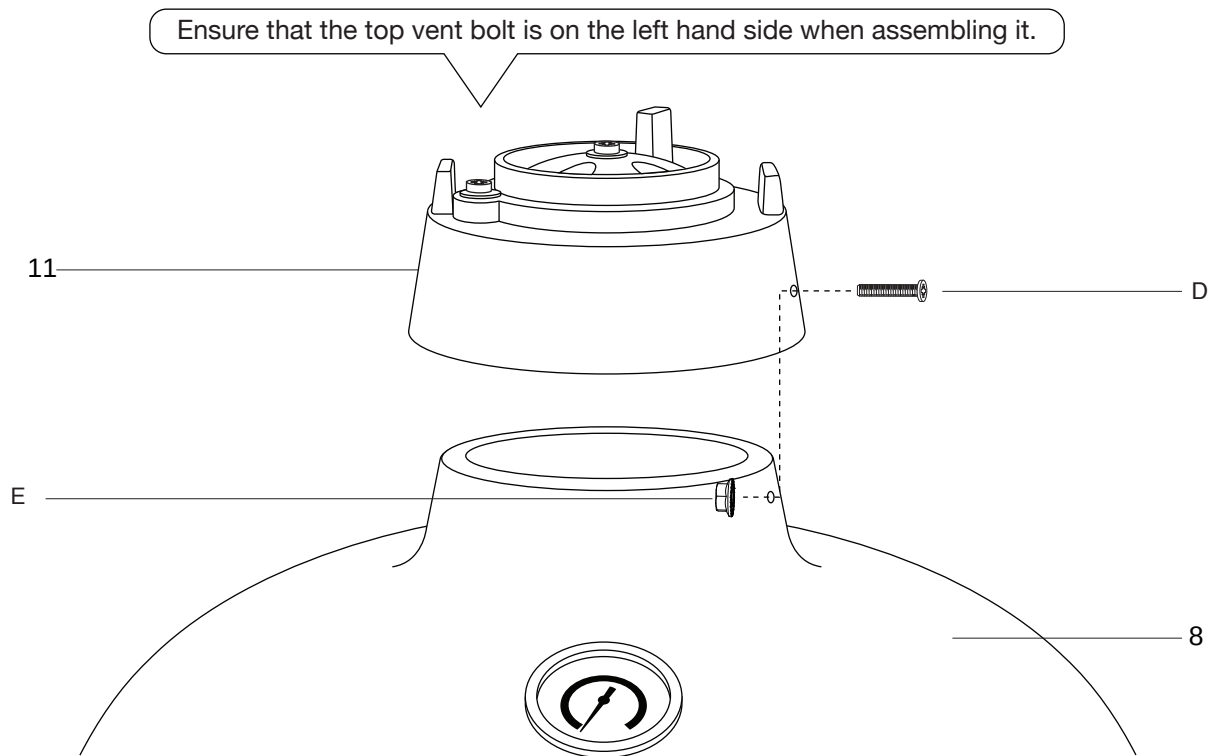


STEP 11 - To attach the top vent (11) to the Kamado Grill (8) place it on top and align both the bolt holes. Secure using 2x bolts (D) and nuts (E) Ensure that the top vent bolt is on the left hand side when assembling it.

Assembly instructions

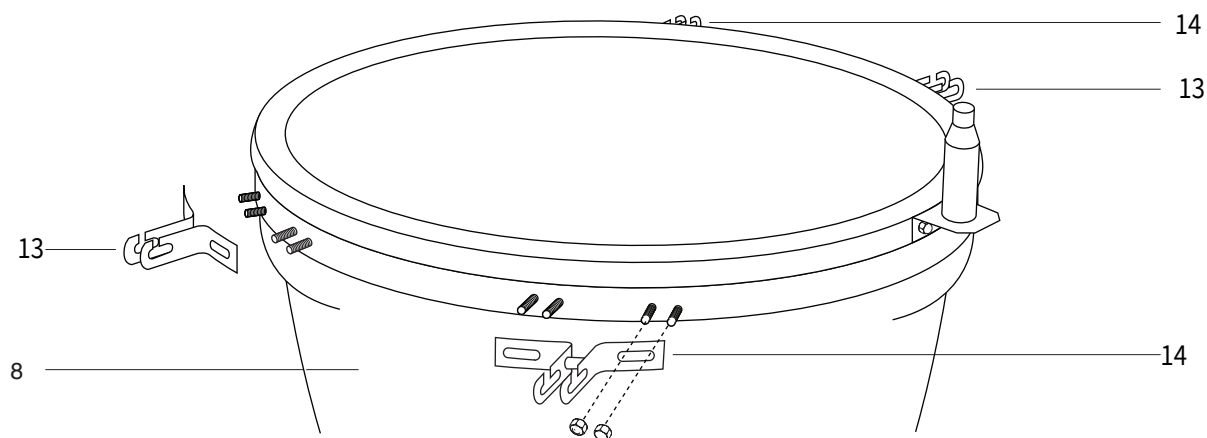

STEP 12 – Attach the 2x table brackets (13) to the Kamado Grill (8) using the 4x pre-attached bolts and dome headed nuts per bracket. Please note the position shown in the above diagram

STEP 13 – Attach the 2x table brackets (14) to the Kamado Grill (8) using the 4x pre-attached bolts and dome headed nuts per bracket. Please note the position shown in the above diagram.

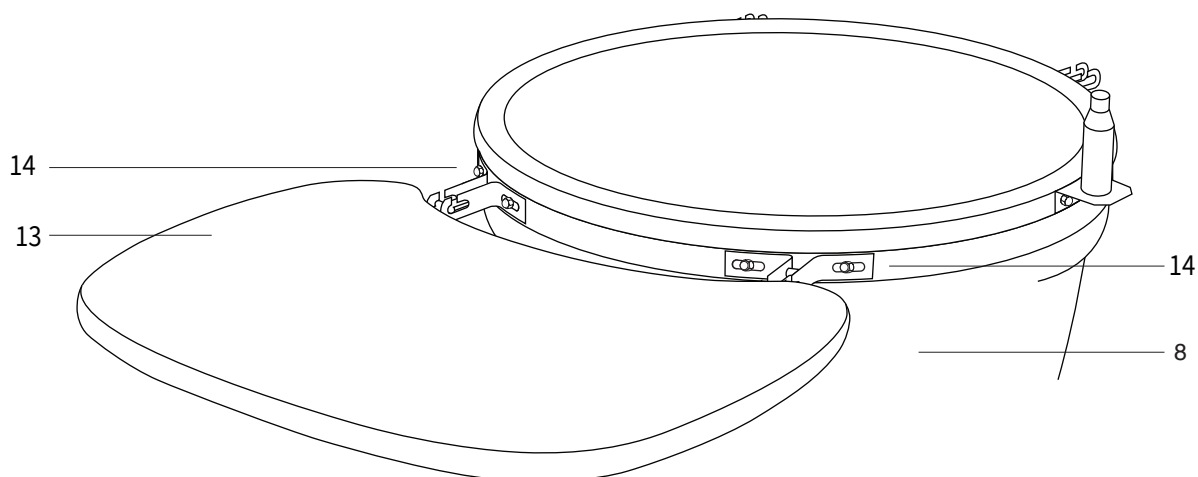

STEP 14 - Insert the 2x table hinge into each of the table brackets (13 & 14).

The Kamado Grill is now ready to use but please ensure that you have read the curing instructions thoroughly prior to use.